

LUCERNA

LIGHTING

LUNA 10

DOWNLIGHT ROUND

FIXED TRIMLESS

The Luna range of downlighters have been designed with a clean and minimalist architectural style. The discreet appearance is complimented by the popular Xicato LED module that provide industry leading light quality and consistency. This range of luminaires is designed, manufactured and assembled in the UK to ISO 9001:2008 and high environmental standards.

The fixed trimless Luna 10 downlighter is plastered into the ceiling for a flush seamless installation. It comes fitted with a low iron, optical glass diffuser to provide a soft even illumination. The internal mechanism allows for a quick onsite adjustment between flush and 2 step recessed without the need for any tools.

The Luna 10 range is fitted with the Xicato XTM Artist light engine as standard with GU5.3 halogen or retrofit LED options available on request.

PRODUCT SPECIFICATION

Lamp Lumens	800lm	1055lm	1400lm
Efficacy	98lm/w	89lm/w	82lm/w
Wattage	8.2w	11.9w	17w
Forward Voltage	23.4v	23.8v	24.3v
Supply Current	350mA	500mA	700mA
Beam Widths	40°		
CRI	>95 (Typical 97)		
TM-30 Colour Fidelity (Rf)	96		
TM-30 Colour Gamut (Rg)	103		
Binning	1/2 Macadam Ellipses		
Lumen Maintenance	L70/B0 at 50,000 hours		
Colour Temperatures	2700K, 3000K, 3500K or 4000K		
Max Ambient Temperature	25°C		
LED Manufacturer	Xicato - XTM Artist Series		
Wiring	Series		
IP Rating	IP20		
Finish	Trimless		
Fixing	Plaster in		



CE	Class III	IP 20	CRI > 95	Cutout 105mm	0-10v
----	-----------	-------	----------	--------------	-------

DIMENSIONS

Cutout	105mm
Inner diameter	97.5mm
Flush height	79mm
Recessed height	95mm (SEMI) 105mm (FULL)

FIREHOODS

FH2 245 x 150 x 160mm


Note: If required, firehoods are specified as an additional item

DRIVERS


	DR40	DR55
Wattage	20w	30w
Current	350mA, 500mA or 700mA	350mA, 500mA or 700mA
Min Voltage	2v	2v
Max Voltage	40v	55v
Dimming Protocol	0-10v	0-10v
Installation	Through cutout	Through cutout

Note: Drivers specified as an additional item. Phase and DALI dimmable drivers available on request.

FLUSH POSTION

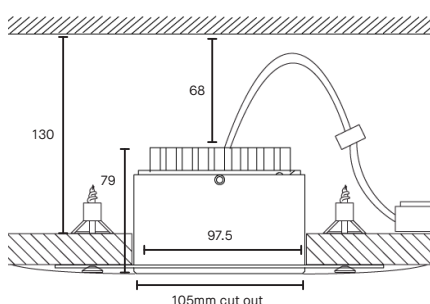

SEMI RECESSED POSTION

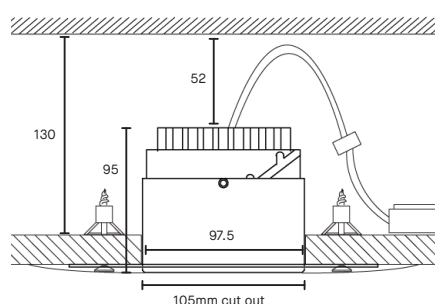

FULL RECESSED POSTION

